





ELECTRO PARTS
AUSTRALIA PTY LTD



Index

Power Products

	Page
Battery Monitors	15
Battery Chargers	16-17
Battery Protectors	24
DC-DC Chargers	21-24
DC-DC Chargers with Solar	21
DC-DC Converters	19-24
DC-DC Converter/Chargers	23-24
DC-DC Converters Sealed	19
DC-DC Voltage Boosters	18
Power Supplies	18
Sine Wave Inverters	10-14

Solar Products

	Page
Solar Accessories	4-5
Solar Adhesive	6
Solar Charge Controllers	6-9
Solar Connectors	5
Solar Panels	1-3

Automotive Accessories

	Page
Battery Fuses & Holders	36
Bootlace Terminal Kit	32
Bridge Rectifiers	38
Bus Bars	36
Cable Ties	36
Circuit Breakers	31-32
Connectors	37
Diodes	38
Electronic Flasher	39
Fuse Adaptors	34
Fuse Boxes / LED Fuse Boxes	33
Fuse Holders	33-34
Fuses & Fuse Tools	35
Galvanic Isolator	39
LED Fuse Holders	35
LED Lights	25-30
Starter Solenoid Contacts & Plungers	39
Relays & Relay Bases	38
Turbo Timers	39

Prices shown on [Info/Price](#) links are RRP. For Wholesale pricing, Login to your existing account or Register at <https://www.electroparts.com.au/register> to request Wholesale access.

TERMS & CONDITIONS

ORDERS

See website for full Conditions & Warranty Terms.

FREIGHT

Brisbane Metro - \$15 + GST*. Outside Brisbane Metro - \$20 + GST*. Freight charges subject to change. Excludes batteries.

* Due to increasing freight costs, effective immediately, we are unable to guarantee the flat rate freight cost for bulky orders. Depending on your delivery address we reserve the right to charge additional freight where required. We will contact you to discuss the additional freight costs and options available to you after your order is received. If you require any clarification on this please contact us on 1300 10 60 10.

RETURNS - RESTOCKING FEE

We will accept return of merchandise ONLY IF IN SALEABLE CONDITION and notification is within 7 days of receipt. All products returned to Electro Parts Pty Ltd will incur a 20% restocking fee. The restocking fee does not apply to warranty items or items not fit for purpose. Cost of all return shipping shall be the responsibility of the customer.

CATALOGUE DISCLAIMER

While every effort is made to ensure the accuracy of information contained in this catalogue, Electro Parts Australia Pty Ltd does not accept responsibility for any inaccuracy's. All images in this catalogue are for illustration purposes only, final product may differ in appearance and specifications are subject to change without notice. All prices are subject to change without notice. Published March 2025.

GLASS SOLAR PANELS

VOLTECH



Voltech solar panels are made with high quality Monocrystalline cells, strengthened glass and have a tough aluminium frame. Our wide range of panels are perfectly suited for caravans, camper trailers, 4x4 vehicles, farming applications, mobile communications, mining and many more applications.

- A Grade Monocrystalline cells
- New compact and light weight models
- 100-370W with MC-4 type connectors
- Preferred by many caravan & RV OEM's
- Low profile frames
- Hardened glass
- 70-370W with 900mm cable
- 24 Month warranty

12V Model

Model	Pwr	Vmp	Imp	Voc	Isc	LxWxH (mm)	Weight	Frame	Info/Price
SP5M	5W	18.0V	0.28A	21.60V	0.29A	230x205x20	0.7kg	Silver	
SP10M	10W	18.0V	0.56A	21.6V	0.59A	340x240x20	1.0kg	Silver	
SP20M	20W	18.0V	1.12A	21.6V	1.18A	430x350x20	1.7kg	Silver	
SP40M	40W	18.0V	2.23A	21.6V	2.36A	540x510x25	3.1kg	Silver	
SP70M	70W	18.0V	3.89A	21.6V	4.12A	820x510x30	4.5kg	Silver	
SP100ML	100W	19.6V	5.11A	23.3V	5.61A	1010x510x30	6.25kg	Silver	
SP100MLB	100W	19.6V	5.11A	23.3V	5.61A	1010x510x30	6.25kg	Black	
SP130ML	130W	18.15V	7.16A	21.45V	7.92A	1320x510x30	8.15kg	Silver	
SP130MLB	130W	18.15V	7.16A	21.45V	7.92A	1320x510x30	8.15kg	Black	
SP160M	160W	19.8V	8.09A	23.76V	8.57A	1225x670x30	8.4kg	Silver	
SP160MB	160W	19.8V	8.09A	23.76V	8.57A	1225x670x30	8.4kg	Black	
SP180ML	180W	21.6V	8.34A	25.92V	8.83A	1320x670x30	9.0kg	Silver	
SP180MLB	180W	21.6V	8.34A	25.92V	8.83A	1320x670x30	9.0kg	Black	
SP200M	200W	19.8V	10.11A	23.76V	10.71A	1470x670x30	10.1kg	Silver	
SP200MB	200W	19.8V	10.11A	23.76V	10.71A	1470x670x30	10.1kg	Black	
SP200MSB *	200W	18.0V	11.12A	21.6V	11.78A	1035x995x30	10.3kg	Black	

* 200mm cable from each junction box

24V Model

Model	Pwr	Vmp	Imp	Voc	Isc	LxWxH (mm)	Weight	Frame	Info/Price
SP40M36	40W	37V	1.09A	44.4V	1.15A	570x410x25	3.1kg	Silver	
SP300M	300W	34.8V	8.63A	41.76V	9.14A	1650x880x30	14.3	Silver	
SP370MB	370W	34V	10.89A	40.8V	11.54A	1755x1038x30	19.5kg	Black	

All ratings are +/- 3%

LIGHT WEIGHT SOLAR PANELS

SUNMAN

75% LIGHTER - 85% THINNER - 100% IMPROVEMENT

Sunman eArc is a light weight and ultra-thin solar panel made with a fibreglass reinforced composite material similar to aircraft windows, and 75% lighter than conventional solar panels, making it far less costly to transport and install. eArc light weight solar panels are ideal for caravans, motorhomes, RV's, 4WDs, boats, yachts & even trains.

- **Ultra-light** - eArc weighs around 75% less than conventional PV panels. Panels measure just 2mm thick.
- **Flexible** - eArc combines a unique, patented material to produce a superior flexible crystalline-silicon/ panel which can be installed on curved surfaces.
- **Easy Installation** - eArc can reduce installation cost through ease of handling and faster installation.
- **Durability** - eArc panels are certified to withstand maximum test load (2400 Pascal) and hail tested with 200g/35mm diameter ice stones at 39.5m per second.



Model - 12V	Edge Style	Pwr	Vmp	Imp	Voc	Isc	LxWxH (mm)	Weight	Info/Price
SMF100F-3X12UW	Frameless	100W	21.2V	4.75A	25.2V	5.12A	1093x582x2	2.1kg	
SMF175M-4X09UW	Frameless	175W	19.5V	8.98A	23.9V	9.50A	1504x673x2	3.0kg	
SMF190F-4X16UW	Frameless	190W	18.6V	10.22A	22.1V	10.72A	1438x710x2	3.25kg	
SMF215F-4X18UW	Frameless	215W	21.0V	10.24A	24.9V	10.72A	1610x710x2	3.8kg	

Model - 24V	Edge Style	Pwr	Vmp	Imp	Voc	Isc	LxWxH (mm)	Weight	Info/Price
SMF430F-12X12UW	Frameless	430W	42V	10.24A	49.8V	10.74A	2054x1093x2	7.3kg	

All ratings are +/- 5%

SF-200S


Flexiible solar panel

Voltech IBC Lightweight Solar Panels combine a unique, patented polymer material with industry-leading technologies to produce a flexible monocrystalline panel that can be installed on a curved surfaces.

• IBC Technology -No busbars to block sunlight

- Monocrystalline IBC cells
- Anti-PID and zero LID
- Excellent low light performance
- IP68 Rated
- MC4 Connectors
- 5 Year warranty

VOLTECH ➔

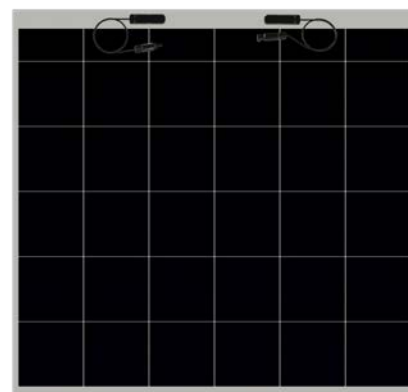

Model - 12V	Edge Style	Pwr	Vmp	Imp	Voc	Isc	LxWxH (mm)	Weight	Info/Price
SF-200S	Frameless	200W	20.4V	9.81A	23.7V	10.71A	1035x995x3	3.1kg	

All ratings are +/- 5%

TRICKLE CHARGE SOLAR PANELS



Compact & Portable Solar Powered Trickle Chargers, Amorphous Cells, Mounted in rugged & light frame using double glass structure for strength & durability. They are Pre-wired with 2.5Mtr cable. Use for keeping your batteries topped-up & to guard against self-discharge when left un-attended. 24 Month warranty.

Model	Pwr	Vmp	Imp	Voc	Isc	LxWxH (mm)	Info/Price
STC-15	1.5W	18V	0.085A	20.5V	0.093A	350x100x13	
STC-25	2.5W	18V	0.14A	20.5V	0.16A	352x125x13	
STC-45	4.5W	18V	0.25A	20.5V	0.28A	353x235x14	

Pwr ratings are +/- 5%

FOLDABLE SOLAR BLANKET

Voltech foldable solar blankets offer high performance charging, strength and portability. Available in 120W & 160W that come with all the accessories needed to quickly set up a portable charging system. Voltech foldable solar blanket kit features -

- Monocrystalline cells
- 120W & 160W sizes available
- IP68 - 12V PWM Charge controller included
- 24 Month warranty

- Light weight & compact
- Available with or without legs
- 50A Grey Anderson style connectors



Model	Pwr	Vmp	Imp	Voc	Isc	Controller	Legs	LWH Closed (mm)	LWH Open (mm)	Weight	Info/Price
FSB-120	120W	18.1V	6.67A	21.24V	7.33A	20A	No	370x380x80	1100x730x10	4.5kg	
FSB-120L	120W	18.1V	6.67A	21.24V	7.33A	20A	Yes	450x520x50	1820x520x10	5.9kg	
FSB-160	160W	19.8V	8.08A	21.24V	8.89A	20A	No	360x480x80	1100x940x10	5.5kg	
FSB-160L	160W	19.8V	8.08A	21.24V	8.89A	20A	Yes	430x540x80	2195x540x10	7.1kg	

All ratings are +/- 3%

FSP-200EL



- 200W with supporting legs
- ETFE Laminated
- High-efficiency Monocrystalline cells
- 4.5M Extension with Anderson Style Connectors
- 24 Month warranty

Optional accessories

- SCL-1550L - 15A 12V MPPT Charge controller
- AP-50G-BC - Battery clamp adaptor

Model	Pwr	Vmp	Imp	Voc	Isc	Controller	Legs	LWH Closed (mm)	LWH Open (mm)	Weight	Info/Price
FSP-200EL	200W	20.0V	10.0A	25.0V	10.6A	NIL	Yes	550x555x35	2430x550x10	5kg	


All ratings are +/- 5%

SOLAR ACCESSORIES

ABS Plastic Solar Panel Mounting Brackets



SA-101



SA-101B




SA-102



SA-102B



SA-103



SA-103B



SA-104



SA-104B




SA-201



SA-201B



SA-202



SA-202MC4



SA-202B



SA-202BMC4

Model	Qty	Description	LxWxH (mm)	Info/Price
SA-101	4	Corner bracket	150x150x65	
SA-101B	4	Corner bracket (BL)	150x150x65	
SA-102	2	Medium side bracket	530x90x65	
SA-102B	2	Medium side bracket (BL)	530x90x65	
SA-103	2	Short side bracket	180x118x65	
SA-103B	2	Short side bracket (BL)	180x118x65	
SA-104	2	Long side bracket	680x90x65	
SA-104B	2	Long side bracket (BL)	680x90x65	
SA-201	1	Junction box 1-way	120x67x40	
SA-201B	1	Junction box 1-way (BL)	210x67x40	
SA-202	1	Junction box 2-way	113x93x43	
SA-202MC4	1	Junction box 2-way - MC4	113x93x43	
SA-202B	1	Junction box 2-way (BL)	113x93x43	
SA-202BMC4	1	Junction box 2-way (BL) - MC4	113x93x43	

Aluminium Solar Panel Mounting Brackets

AB-100B

4 x Black Aluminum Z Brackets



8 x M5*25mm
8 x M6*30mm & 8 nuts
4 x M6*15mm & 4 nuts


AB-100S

4 x Silver Aluminum Z Brackets



8 x M5*25mm
8 x M6*30mm & 8 nuts
4 x M6*15mm & 4 nuts

AB-510S

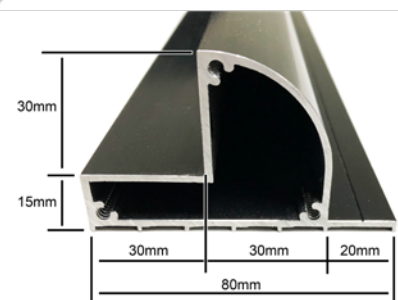

Model	Qty	LxWxH (mm)	Colour	Info/Price
AB-100B	4	100x40x67	Black	
AB-100S	4	100x40x67	Silver	
AB-510S	2	510x80x46	Silver	

SOLAR ACCESSORIES

Solar Connectors

Max. rated current 30A



MC4



MC4-2A



MC4-3A



MC4-4A



MC4-2CA



MC4-3CA



MC4-4CA



MC4T

Model	Qty	Description	Info/Price
MC4	1 pair	Connector	
MC4T	10 pair	Male & Female Terminals	
MC4-10	10 pair	Connector	
MC4-2A	1 pair	2 Way Y Adaptor	
MC4-3A	1 pair	3 Way Adaptor	
MC4-4A	1 pair	4 Way Adaptor	
MC4-2CA	1 pair	2 Way Cable Adaptor	
MC4-3CA	1 pair	3 Way Cable Adaptor	
MC4-4CA	1 pair	4 Way Cable Adaptor	

MC4-FH10

MC4-FH15

MC4 Solar Panel Fuse Holder & Fuse



Model	MC4-FH10	MC4-FH15
Contacts material:	Copper	
Insulator Material:	PC	
Max. working voltage:	DC1000V	
Fuse Current:	10A	15A
Flame class:	UL94-V0	
Contact resistance:	≤ 5mm Ω	
Shell Protection degree:	IP65	
Spec. of Connecting Line:	1.5~6mm ²	
Ambient temp. range:	-40 to +85 °C	
Safety Level:	Class II	
Info/Price		

MC4-F10A

MC4-F15A

Replacement Solar Fuses

Model	Amp	Info/Price
MC4-F10A	10A	
MC4-F15A	15A	




TC4-1M

TC6-1M

Solar PV1-F Cable - Sold per/M

- Conductor: Tinned plated copper
- Insulation: XLPO
- Voltage rating: 1.0/1.0Kv AC - 1.5Kv DC
- Test voltage: 6.5Kv AC - 15Kv DC, 5Min
- Temp rating: - 40°C to 90°C
- Flame tested: EN60332-1-2
- TUV approved: PFG 1169/08.2007



Model	Size	Per	Info/Price
TC4-1M	4mm ²	1M	
TC6-1M	6mm ²	1M	

MULTI-PURPOSE ADHESIVE

FIX15W / FIX15B

Multi-purpose Adhesive Sealant 290ml

Fix 15 is a high quality single component joint sealant with high adhesive strength. It is based on MS Polymer®, which is chemically neutral and fully elastic with excellent primerless bonding. For use in low movement joints, adhesion and waterproofing in the construction, automotive, marine and aerospace industries where a strong bond and/or UV resistant flexible seal is required. Visit our website for full technical data.

Model	Colour	Info/Price
FIX15B	Black	
FIX15W	White	



SOLAR CHARGE CONTROLLERS: PWM

IR220 - (12V/24V - 20A)



- Sealed (IP 68)
- LED Indicators
- Auto Batt. V Detect
- 24 Month Warranty

Model	IR220
System Voltage	12V/24V
Max PV Panel VOC	50V
Max PV Panel ISC	20A
Charging Current	20A
Min Operating Voltage	6V
Charging Voltage - Absorption	14.3V / 28.6V
Charging Voltage - Float	13.8V / 27.6V
Low Voltage Disconnect	11.5V / 23V
Low Voltage Reconnect	12.6V / 25.2V
LxWxH (mm) - Weight	82x45x20 - 0.12Kg
Info/Price	

ISC-1000 - (12V - 10A)

ISC-3030 - (12V/24V - 30A)

- Auto battery detect
- Pre-set & Adjustable charging voltages
- Output load terminals with LVD
- LCD display (ISC-3030 only)
- IP32 rating
- PWM switching
- Electronic blocking
- High efficiency
- 24 Month Warranty



ISC-1000



ISC-3030

Model	ISC-1000	ISC-3030
System Voltage	12V	12V/24V
Display	LED	LCD
Max PV Voltage (VoC)	<27	<45V
Max. Input/Load Current	10A	30A
No Load Current	<10mA	<20mA
Float Voltage 12V/24V	13.5V/NA	13.5V/27V
Bulk Voltage 12V/24V	14.4V/NA	13.8V-14.8V/27.6V-29.6V
Low Voltage Reconnect 12V/24V	12.5V/NA	12V/24V
Low Voltage Disconnect 12V/24V	11V/NA	11V/22V
Operating Temperature	-20 deg - +50deg C	
Terminal	3mm Sq.	8mm Sq.
Efficiency	98%	
LxWxH (mm) - Weight	118x90x31 - 0.15Kg	169x97x44 - 0.40Kg
Info/Price		

SOLAR CHARGE CONTROLLER: PWM

P2440N - (12V/24V - 40)

VOLTECH ➔

Bluetooth®



• Use as Solar Controller and Battery Protector

- 40A PWM Switching
- 12/24V with auto battery detect
- LCD display & key operation
- Pre-set & User adjustable charging voltages
- Over-charge, Over-discharge, Short-circuit Reverse polarity, Over-heat & Over-load protection
- 40A Output load terminals with LVD
- In-built Bluetooth for smart phone APP
- Suits Flooded/AGM/GEL/Lithium batteries
- Multiple DC load output controls available
- USB Outlet - 5V/1Amp
- 24 Month Warranty

Model	P2440N
Max PV Voltage (VoC)	<55V
Max PV Watts	600W/12V 1200W/24V
Maximum Input/Load Current	40A
No Load Current	8mA/12V 12mA 24V
Battery Voltage/Type (Auto detect)	12V/24V - STD/AGM/GEL/LI/USER
Float Voltage 12V/24V	13.8V / 27.6V
Bulk Voltage 12v	STD:14.6V / AGM: 14.4V / GEL: 14.2V / LI:14.2V
Bulk Voltage 24v	STD:29.2V / AGM: 28.8V / GEL: 28.4V / LI:28.4V
Low Voltage Disconnect/Reconnect 12V/24V	11.1V/22.2V - 12.6V / 25.2V
LxWxH (mm) - Weight	159x118x59 - 0.65Kg
Info/Price	

SOLAR CHARGE CONTROLLERS: MPPT

SCL-1550L - (12V - 15A)

- Innovative Full Digital MPPT technology
- Preprogrammed for Lithium (LiFePO4) type batteries
- Also suitable for AGM/Sealed Batteries
- IP67, Strong and durable aluminum case
- Full automatic electronic protect function



Model	SCL-1550L
System Voltage	12V
Maximum Input Current	15A
Max PV Voltage (VoC)	<35V
Battery Type	Lithium (LiFePO4)
Charging Voltage Recovery/Target	13.5V/14.4V
Max Input Power (Watts)	200W
Bulk Voltage	14.4V
Low Voltage Disconnect/Reconnect	11.1V / 12.5V
Operating Temperature	-35 deg - +60deg C
LxWxH (mm)	86x81x23 - 0.26Kg
Info/Price	

SOLAR CHARGE CONTROLLERS: MPPT

MPPT technology helps to extract up to 30% more power out of same solar panels. This technology will enable your batteries to be charged faster with fewer solar panels. They also have the ability to charge 12V batteries from 12V or 24V solar panels.

SCP030 - (12V /24V - 30A)
SCP050 - (12V/24V - 50A)



- MPPT Solar Controller
- 12/24/36/48V Auto Select
- 30Amp or 50Amp models available
- PV: SCP030 (500W - 12V) - (1000W - 24V)
- PV: SCP050 (700W@12V) - (1400W - 24/36/48V)
- PV Input VoC: SCP030 - 100V - SCP050 - 135V
- Backlit LCD display
- 2 x USB Outlets
- Monitor System via Smart Phone App
- Preset battery types including LiFePO4
- Optional battery temperature sensor - TS-10
- 24 Month warranty



Optional Temp Sensor

Model	Cable	Info/Price
TS-10	3M	



	Technical Info	SCP030		SCP050	
PV Input	Max. PV Power @ 12V/24V	500W	1000W	700W	1400W
	Max. PV Power @ 36V/48V	-		1400W	1400W
	PV MPPT Voltage Range @ 12V/24V	16 - 80VDC	32 - 80VDC	16 - 80VDC	32 - 80VDC
	PV MPPT Voltage Range @ 36V/48V	-		48 - 108VDC	64 - 108VDC
	PV VoC Max.	100VDC		135VDC	
	MPPT efficiency	≥ 99%			
Battery	Battery Voltage/Type (Auto detect)	12V - STD/AGM/LiFePO4	24V/36V/48V - STD/AGM		
	Max. Charging Current	30A		50A	
	Max. Charging Voltage	STD: 14.4V/28.8V AGM: 14.6V/29.2V LiFePO4: 14.5V/29V		STD: 14.4V/28.8V/43.2V/57.6V AGM: 14.6V/29.2V/43.8V/58.4V LiFePO4: 14.5V/29V	
DC Load & Output	Max. Load Current	30A		50A	
	Low Battery Protection (Programmable) 12V/24V	10V~11.5V	20V~23V	10V~11.5V	20V~23V
	Low Battery Recover (Programmable) 12V/24V	12V~13V	24V~26V	12V~13V	24V~26V
	Low Battery Protection (Programmable) 36V/48V	-		30V-34.5V	40V-46V
	Low Battery Recover (Programmable) 36V/48V	-		36V-39V	48V-52V
	USB Output Voltage - Single Output Current	5V - 3A			
	Total Output Current for 2 USB	3.4A			
	USB Low Battery Protection/ Recover Voltage	10.5V - 11.0V			
Standby Current (WiFi Off/On Mode)		≤60mA - ≤160mA			
Operating Temperature Range		-10°C/+50°C			
Dimensions (LxWxH) - Weight		238x177x63mm - 1.5kg		238x177x73mm - 2.3kg	
Info/Price					

SOLAR CHARGE CONTROLLERS: MPPT

SCW15M / SCW30M / SCW50M / SCW70M

- MPPT Solar Controller
- 12/24 V Auto Select and 48V on SCW70M
- 15/30/50/70Amp Output Models available
- 30/50/70Amp Models with Lithium preset
- PV Input Volts up to 150V
- Intelligent battery management
- Graphical LCD display
- Simple menu-driven operation
- Output load terminals with LVD (SCW15M)
- 24 Month Warranty



SCW15M



**SCW30M
SCW50M**



SCW70M

Model	SCW15M	SCW30M	SCW50M	SCW70M
Battery voltage	12/24 V Auto Select			12/24/48 V Auto Select
Maximum battery current	15A	30A	50A	70A
Maximum PV power, 12V 1a,b)	200W	440W	720W	1000W
Maximum PV power, 24V 1a,b)	400W	880W	1440W	2000W
Maximum PV power, 48V 1a,b)	N/A			4000W
Automatic load disconnect	Yes, max. load 15A	N/A		
Maximum PV open circuit voltage	100V			150V
Peak efficiency	98%			
Self consumption	20mA			<35mA @ 12V/ 20mA @ 48V
Charge voltage 'absorption'	Default setting: 14.4V / 28.8V / 57.6V (adjustable)			
Charge voltage 'equalization'	N/A	Default setting: 16.2V / 32.4V / 64.8V (adjustable)		
Charge voltage 'float'	Default setting: 13.8V / 27.6V / 55.2V (adjustable)			
Temperature compensation	-16mV/°C resp. -32mV/°C resp. -64mV/°C			
Protection	Battery reverse polarity (fuse) Output short circuit / Over temperature			
Operating temperature	-30 to +60°C (full rated output up to 40°C)			
Power terminals	6mm² / AWG10	13mm² / AWG6		35mm² / AWG2
Protection category	IP43 (electronic components) / IP22 (connection area)			
Dims (HxWxD) mm - Weight kg	136x98x55 - 0.4	186x125x83 - 1.25	186x125x83 - 1.6	248x178x103 - 2.6
Safety	EN/IEC 62109			
1a) If more PV power is connected, the controller will limit input power to maximum power. 1b) PV voltage must exceed Vbat + 5V for the controller to start. Thereafter minimum PV voltage is Vbat + 1V.				
Info/Price				

PRO SERIES PURE SINE WAVE INVERTER

NEW

With Built-in RCD & AC Transfer Switch



- Pure Sine Wave (TD<3%)
- Built-in RCD Safety Switch
- Built-in Auto AC Transfer Switch
- Built-in LCD Display that can be relocated or an additional Remote Control installed
- 12V & 24V Models available
- 1000W, 2000W & 3000W Models available
- Built for 24 hr. operation
- Soft start function
- Variable speed cooling fan
- Power saving mode
- Single AC outlet & hard wire option
- Vehicle ignition trigger function (+12V)
- Output voltage 230V AC 50Hz
- DC Low & Over voltage protection
- DC Low Voltage alarm
- AC Short circuit & overload protection
- Over temperature protection
- 24 Month Warranty



Additional Remote Control/Display

Model	Cable	Voltage	LxWxH(mm)	Info/Price
PSTR-12	5M	12V	78x78x26	
PSTR-24	5M	24V	78x78x26	

12v Model	24v Model	AC Outlet	Cont. Pwr	Surge Pwr	LxWxH	Info/Price
PST1000-12	PST1000-24	1 + hardwire	1000W	2000W	370x245x110	
PST2000-12	PST2000-24	1 + hardwire	2000W	4000W	380x245x110	
PST3000-12	PST3000-24	1 + hardwire	3000W	6000W	410x245x110	

PRO SERIES - SUPERSEDED MODEL



**CLEARANCE LINE
LIMITED STOCK**



- Pure Sine Wave <2.5%
- Built for 24 hr. operation
- Power saving mode (Eco) <1W
- Turbo mode: 120% continuous output power when temp <30° C
- Single AC outlets (700W models)
- Dual AC outlets (1500W & 2000W models)
- Single AC outlet & hard wire option 3000W models
- Output voltage 230V AC 50Hz
- DC under input & over voltage protection
- Short circuit & overload protection
- Reverse polarity protection
- Over temperature protection
- 24 Month Warranty
- Optional Remote/Control Display

Optional Remote Control/Display

Model	Cable	LxWxH(mm)	Info/Price
TRN-100	8M	110x60x35	

12v Model	24v Model	Remote	AC Outlet	Cont. Pwr	Surge Pwr	LxWxH	Kg	Info/Price
PS700-12	PS700-24	Optional	1	700W	1400W	240x222x89	2.9	
PS1000-12	NLA	Optional	1	1000W	2000W	280x222x89	3.6	
PS1500-12	NLA	Optional	2	1500W	3000W	340x222x89	4.3	
NLA	PS2000-24	Optional	2	2000W	4000W	405x222x89	5.8	
PS3000-12	NLA	Optional	1 + hardwire	3000W	6000W	490x222x89	6.8	

PS3000-12 models include 1 x 230Vac outlet and hard wire option.

VP SERIES PURE SINE WAVE INVERTERS



VP Series Inverters

- Pure Sine Wave
- Dual AC outlets
- Output voltage 230V AC 50Hz
- Dual USB output - 5V/2.4A
- Under input voltage protection
- Over voltage protection
- Short circuit protection
- Overload protection
- Over temp protection
- Optional Remote/Control Display
- 12 Month Warranty

**CLEARANCE LINE
LIMITED STOCK**

RC-3 Optional Remote Control/Display



12v Model	Cont. Pwr	Surge Pwr	LxWxH(mm)	Kg	Info/Price
VP1000-12	1000W	2000W	326x215x90	2.85	
VP1500-12	1500W	3000W	375x215x90	3.15	

Model	Cable	LxWxH(mm)	Info/Price
RC-3	3M	95x90x25	
CA-8	8M	Cable only	

PROVISTA PURE SINE WAVE INVERTERS

- AC output voltage: 230Vac
- Output frequency: 50 Hz
- Maximum Efficiency: 92%
- Display: 2 coloured LED for showing operation and fault messages
- 12 month warranty

**CLEARANCE LINE
LIMITED STOCK**



Model	Voltage	Cont. Pwr	Surge Pwr	LxWxH (mm)	Info/Price
TSW700	12V	700W	1400W	203x336x80	
TSW1500	24V	1500W	3000W	203x336x80	

DELUXE PURE SINE WAVE INVERTERS

COTEK

New generation pure sine wave inverters from COTEK. Higher efficiency, high power density, Selectable output voltage and frequency with a robust aluminium case.

- Pure sine wave <3% THD
- Power saving mode
- High efficiency
- Built for 24 hr. operation, where extra quality and reliability is needed
- LED visual display
- Low battery alarm
- Overload & Short circuit & Over temp. protection
- Under & Over input voltage protection
- Various remote control/display options (see below)
- 24 Month Warranty (SP/SD Models)
- 12 Month Warranty (SK Models)

**CLEARANCE LINE
LIMITED STOCK**



SK SERIES



SP SERIES



SD SERIES

12v Model	24v Model	48v Model	Cont. Pwr	Surge Pwr	LxWxH (mm)	Kg	Info/Price
SK-700-212	-		700W	1400W	310x185x75	2.75	
SP-700-212	-		700W	1400W	330x200x83	2.6	
	SD-2500-224		2500W	4000W	436X283X128	8	
-	SP-3000-224		3000W	6000w	442x255x158	8.2	
SD-3500-212	SD-3500-224	SD-3500-248	3500W	6000W	496X283X128	10	

SD Series Cotek Inverters include a built-in AC transfer switch and can be hard wired into your system.

COTEK REMOTE CONTROL/DISPLAYS



CR-6



CR-8



CR-10



CR-16A

Model	Suit	LxWxH (mm)	Info/Price
CR-6 (12V)	SK & SD Models	130x120x27	
CR-6 (24V)	SK & SD Models	130x120x27	
CR-8	All Models	74x57x27	
CR-10	SD Models	92x92x36	
CR-16A	SP Models	98x85x27	

- Neat and Tidy Flush-mount
- LED status indicators
- Bar Graphs (CR-6 & CR-16A)
- LCD Display (CR-10)
- 7.5m cable included
- 24 Month Warranty

**CLEARANCE LINE
LIMITED STOCK**

PURE SINE WAVE INVERTER

- Pure sine wave <2% THD
- Power saving mode
- Detachable LCD remote
- Hard wire output option
- Accessories included
- 12 Month Warranty

VOLTECH ➔



**CLEARANCE LINE
LIMITED STOCK**



Model	Voltage	Cont. Pwr	Surge Pwr	LxWxH (mm)	Info/Price
HT-S-3000-24	24V	3000W	6000W	575x275x105	

- Pure sine wave <3% THD
- Power saving mode
- High efficiency
- Built for 24 hr. operation
- LED visual display
- Low battery alarm
- Overload & Short circuit & Over temp. protection
- Under & Over input voltage protection
- On/Off remote switch included
- 12 Month Warranty



VOLTECH ➔



Model	Voltage	Cont. Pwr	Surge Pwr	LxWxH (mm)	Info/Price
SD-1600-24	24V	1600W	3200W	455x230x70	
SD-2200-24	24V	2200W	4400W	470x288x95	
SD-3000-24	24V	3000W	6000W	452x208x166	

**CLEARANCE LINE
LIMITED STOCK**

TRADE SERIES PURE SINE WAVE INVERTER

VOLTECH ➔



- Pure Sine Wave
- Dual AC outlets (1000-3000W models)
- USB output - 5V/0.5A (TS-300 & 600 models)
- Output voltage 230V AC 50Hz
- Under input voltage protection
- Over voltage protection
- Short circuit protection
- Overload protection
- Over temp protection
- 12 Month Warranty

Optional Remote Control/Display for 1000 to 3000 Models ONLY



Model	Cable	LxWxH	Info/Price
RS1-5M	5M	95x55x25	
RS1-8M	8M	95x55x25	

Model	Voltage	AC Outlet	AC Transfer SW	Cont. Pwr	Surge Pwr	LxWxH	Kg	Info/Price
TS-1000-12	12V	2	No	1000W	2000W	295x220x83	3.8	
TS-2500-12	12V	2	No	2500W	5000W	400x220x83	5.2	
TS-2500-24	24V	2	No	2500W	5000W	355x220x83	5.2	
TS-2500U-24	24V	2	Yes	2500W	5000W	440x220x83	5.2	
TS-3000-24	24V	2	No	3000W	6000W	470x220x83	7.2	

TS-2500U-24 model has a built-in AC transfer switch.

BATTERY MONITORS

NEW

BM21-500 BM16-500

The BM21-500 & BM16-500 are smart battery monitors with a high-precision meter that allows you to check the status of your battery via the display or your Smartphone with the smart battery monitor App.

Through the use of a 500A current shunt, the battery monitors measure the discharge or recharge currents and calculates the Ampere-hours(Ah) going in and out of the battery.

High-precision voltage measurements are taken and displayed in real-time through the use of a field-installed sense wire. BM21-500 & BM16-500 battery monitors are compatible with all types of batteries, especially Lithium-ion, LiFePO4 batteries.

Suitable for Caravans, Motorhomes, RV's, 4x4s, Marine, Solar Energy Storage, Golf Carts and More.



BM21-500



BM16-500

Displays

- Battery Voltage - Indicator
- Battery Capacity - Indicator
- Battery Current - Indicator
- Charge & Discharge - Indicator
- Battery Total Ampere-hours

Displays

- Battery voltage - Indicator
- Battery Capacity - Indicator
- Battery Current - Indicator
- Battery Total Ampere-hours
- Battery State of Charge (SOC) - Indicator
- Charge & Discharge - Indicator
- Remaining Time
- Battery Alarm

Bluetooth Smart Phone App



Model	LxWxH	Info/Price
BM21-500	59ODx23	
BM16-500	113x69x17	

500 A (Peak) - 350 A (Cont.) Shunt



1m Extension Cable



Fused Power Cable

Optional Cables

Model	Cable	Info/Price
BM21-3MC	3M	
BM21-6MC	6M	
BM16-3MC	3M	
BM16-6MC	6M	

BATTERY CHARGERS

MW-25
12V - 25A



Features

- Suitable for lead-acid (Pb) and li-ion batteries
- Auto ranging with ultra-wide charging voltage (10.5V~21V)
- Built-in CANBus protocol for control, setting and monitoring
- Programmable charging curve via optional adaptor
- Manual setting for 2/3 stage and 4 built-in charging curves via DIP switches
- Multiple protections:
 - Short circuit
 - Over voltage
 - Over temperature
 - Battery under voltage
 - Reverse polarity
- Charger OK and Battery Full signal
- Temperature compensation function to prolong battery life (Lead-acid only)
- -30C ~+70C wide operating temperature
- Thermal controlled DC fan for noise reduction
- Remote ON/OFF control
- Complies with 62368-1 & 60335-1:2.29
- 3 Year warranty

MW-43
12V - 43A



Model	MW-25	MW-43	MW-70
Output Current	25A	43A	70A
Input Voltage	10~264VAC 47~63Hz		
Bulk Voltage (Default)	14.4V DC		
Float Voltage	13.8V DC		
Efficiency	92%		
DC Output	1		
Rec Battery Size	90 - 300 AH	150 - 500 AH	240 - 800AH
LxWxH (mm)	205x135x55	230x158x67	250x158x67
Weight	1.02kg	1.84kg	1.93kg
Info/Price			

MW-70
12V - 70A



BATTERY CHARGERS

P SERIES - 24V - 5 STAGE CHARGERS



- 5 Stage Charger
- Can be used as a power supply
- For WET, LiFePO4, AGM, GEL & Calcium
- Microprocessor controlled charging
- MCU Monitoring & Data Logging
- Temp sensor included
- 24 Month Warranty

The maximum output current of the Voltech P Series can also be adjusted in 10% increments to match the battery bank capacity.

Model	BC-2415P	BC-2420P
Output Current	15A	20A
Charge Voltage	Absorption	Float
WET	29V	27V
LiFePO4	29.2V	27.2V
LiFePO4 #2	28.8V	27.2V
AGM	28.8V	26.4V
AGM #2	28.6V	26.8V
GEL 2	28.4V	27.4V
CALCIUM	30.2V	27.6V

User 1 & 2 (Prog.)	24 - 32V	
Soft Start Voltage	<21v	
No. of Outputs	2	
Soft Start Current	1/2 of Max	
Input Voltage	200-240V 50Hz	
AC Fuses	AC: T3.15A	AC: T4A
DC Fuses	DC: 25Ax2	DC: 30Ax2
LxWxH with bracket (mm) - Weight	288x240x90 3.2Kg	288x240x90 3.2Kg
Info/Price		



HBR-3100 - Remote Control/Display

Features

- Monitor charge status
- Voltage & current output
- Condition & fault display
- Warning alarm
- Turn output on/off
- 122L x 60W x 15H mm



HBR-3100 **Info/Price**

BC-2408 - 24V/8A

Model	BC-2408
Voltage	24V
Output Current (Max)	7.5A
Input Voltage	180-260V AC 50Hz
Absorption - GEL/WET/CAL	28.2V/28.8V/31.1V
Float - Selectable	26.4/27/27.6V
Efficiency	>85%
DC (+) Outputs	2
Rec Battery Size	30 - 80 AH
LxWxH (mm) - Weight	173x160x61 - 1.4kg
Info/Price	



- Fully automatic 3 stage charging
- Switchable power supply mode
- Soft start mode
- Battery type selector
- Protection for EMI, Over charging, Over-temp, Short circuit & Reverse Polarity
- Thermal controlled variable speed fan
- 12 month warranty

POWER SUPPLY: SWITCH MODE (240VAC)

SPA-8230



- No radio interference
- Constant current protection
- Fine tune output (13.3V - 14.5V)
- Bracket kit included
- 24 Month Warranty

Model	Output V	Output A	LxWxH (mm) - Weight	Info/Price
SPA-8230	13.8V	23A	195 x 115 x 80 - 1.65Kg	

DRS-1210-12



- DIN Rail mount
- Compact in size
- Fine tune 10.5V to 14.0V
- Parallel operation
- High efficiency
- 120 watt total output
- 12 Month Warranty

**CLEARANCE LINE
LIMITED STOCK**

Model	Output V	Output A	LxWxH (mm)	Info/Price
DRS-1210-12	13.8V	10A	126x61x125	

DC TO DC VOLTAGE BOOSTERS 12V - 12V



PB-11 Series

- 12V to 12V
- No radio interference
- Input/output isolated
- Can charge batteries
- 12 Month Warranty

Model	Output	Input Voltage	Output Voltage	LxWxH (mm) - Weight	Info/Price
PB-1130	30A	8 - 16V	12 - 15V	250x115x80 - 1.5Kg	
PB-1140	40A	8 - 16V	12 - 15V	280x115x80 - 1.9Kg	

DC TO DC CONVERTERS

Voltech's NEW range of DC to DC Converters have you covered with outstanding features, high efficiency and a compact size.

Features

- Wide input voltage range
- Design meets RoHS / CE
- High efficiency: Up to 96%
- Internal capacitor: NCC & NICHICON (high reliability)
- 100% full load burn-in test
- Short circuit, Over load, Over voltage, Over temperature protections
- Die-cast aluminum housing
- Epoxy potting
- Waterproof level IP68
- Not for battery charging
- 24 Month Warranty

Applications

- Trucks
- Forklifts
- Buses
- Caravan and RV
- Motors and Pumps
- Golf carts
- Telecommunications
- Marine
- Lighting and LEDs



VC12-503



VC12-503U2



VC24-840



VC24-810



VC24-805

Model	Nominal Specs	Input V	Output V	Output A	Efficiency	Size (mm)	Info/Price
VC12-503	12V to 5V	6-20V	5V	3A	89%	41x27x14	
VC12-503U2	12V to 5V (2 x USB)	6-20V	5V	3A	89%	41x27x14	
VC12-510	12V/24V to 5V	8-36V	5V	10A	92%	64x57x22	
VC24-805	24V to 13.8V	18-36V	13.8V	5A	93%	64x57x22	
VC24-810	24V to 13.8V	18-36V	13.8V	10A	96%	74x74x32	
VC24-820	24V to 13.8V	18-36V	13.8V	20A	95%	74x74x32	
VC24-830	24V to 13.8V	18-36V	13.8V	30A	96%	100x80x39	
VC24-840	24V to 13.8V	18-36V	13.8V	40A	96%	100x80x39	
VC36-810	36V to 13.8V	30-50V	13.8V	10A	94%	74x74x32	
VC36-820	36V to 13.8V	30-50V	13.8V	20A	94%	74x74x32	
VC48-810	48V to 13.8V	35-60V	13.8V	10A	94%	74x74x32	
VC48-820	48V to 13.8V	35-60V	13.8V	20A	94%	74x74x32	
VC48-840	48V to 13.8V	35-60V	13.8V	40A	96.3%	100x80x39	
VC12-2810	12V to 28V	9-16V	28V	10A	94%	74x74x32	
VC12-2830	12V to 28V	9-16V	28V	30A	96%	150x127x63	
VC40-803	Wide Range V to 13.8V	8-40V	13.8V	3A	90%	64x57x22	
VC40-810	Wide Range V to 13.8V	8-40V	13.8V	10A	90%	74x74x32	
VC40-825	Wide Range V to 13.8V	8-40V	13.8V	25A	95%	100x80x39	
VC40-2806	Wide Range V to 28V	9-40V	28V	6A	90%	74X74X32	

DC TO DC CONVERTERS 24V - 12V

- Clean DC output
- Loss of earth protection
- Short circuit protection
- Switch mode
- Up to 38 Volt input
- Reverse polarity protection
- Dual output models
- Output voltage protection
- Overload protection
- 24 Months warranty



Model	VC-2	VC-5	VC-7	VC-12	VC-16	VC-71	VC-121
Output Current	1.5A	5A	7A	12A	16A	7A	12A
Max O/P Amp	1.8A	7A	12A	16A	20A	12A	16A
Input Voltage	11-30V	18-38V					
Output Voltage	3-12V	13.8V DC			13.2V DC	13.8V DC	
Approvals	CE, EMC EN 55011	CE, N2926					
Efficiency	>88%	90%					
No. of Outputs	1					2	
LxWxH (mm)	-	77x75x32	96x75x32	142x75x32	163x75x32	113x75x32	177x75x32
Weight	-	0.2Kg	0.25Kg	0.4Kg	0.45Kg	0.345Kg	0.55Kg
Info/Price							

DC TO DC STEP UP CONVERTER 12V - 24V

- High power density
- LED power on indicator
- 24 Month Warranty
- Output over voltage protection
- EMC Interference immunity
- Short circuit and overload protection
- Power ON - OFF Switch

SDC-310



Model	SDC-310
Input Voltage	10-16V
Output Voltage	28V DC +/- 0.5V DC
Cont. Output Current	8A
Max. O/P Amp	10A
Protection Devices	Overload, Short Circuit
LxWxH (mm) - Weight	156x130x57 - 1Kg
Info/Price	

DC-DC CHARGER & MPPT SOLAR CONTROLLERS

DCS-1240

Input - 12V/24V + PV
Output - 12V/40A

The DCS-1240 is Dual Input DC to DC charger is suitable for charging all common types of automotive or recreational lead acid & LiFePO4 Lithium 12v batteries. The charger can operate on 12 or 24 volts alternators (inc. Smart Alternators) and 12v nominal solar input. In-built Low-Voltage, Over-Voltage, Over-Temperature and Reverse Polarity Protection.

NEW



IP68
waterproof
for under bonnet use



Includes 3 x 50A
Connectors

Model	DCS-1240	
DC Input	11.5-32V	
PV Input (VOC)	9-32V - 500W Max	
Output Current	40A	
Rec. Battery Capacity	120-400Ah	
Standby Current	<10mA	
Operating Temp.	-20 °C to 80°C	
Charger Type	3 Stage	
Charge Voltage	Absorption	Float
Lead Acid	14.4V	13.6V
GEL/AGM	14.1V	13.6V
CALCIUM	15.3V	13.6V
LiFePO4	14.4V	
IP Rating	IP68	
LxWH (mm) - Weight	190x130x40 - 1.3Kg	
Info/Price		

SCM030

12V/12V - 30A
24V/12V - 30A

The SCM030 is designed to fully charge AUX batteries using either the vehicles power (DC to DC booster) or solar panel (MPPT) sources. It will automatically detect when power is available and begin charging. Either input can be set as the "priority source" Charging voltages can be adjusted to suit different battery types including LiFePO4.



- 8-50V DC Input
- 10-50V PV input
- 500W Solar input
- Auto detects input source
- Multi window LCD display
- Programmable charge voltages
- Input source priority select
- Programmable LVD connect voltages
- Can charge 12V batteries from 24V solar
- Fan cooled (auto) for true 30A output
- Optional battery temperature sensor - TS-10
- 24 Month Warranty



TS-10

Optional Temp Sensor

Model	SCM030
DC Input	8-50V
PV Input (VOC)	10-50V 500W Max
Charge Voltage	14-15V Adj
Float Voltage	13.2-13.8V Adj
Output Current	30A
Standby Current	<60mA
Sleep mode Current	<20mA
Min Batt Volt	8V
Min DC Input V	8-26V Adj
DC Input Recon V	8.5-34V Adj
LxWH (mm) - Weight	240x205x88 - 1.9Kg
Info/Price	

Model	Cable	Suits	Info/Price
TS-10	3M	SCM030	

DC-DC CHARGERS

LDC-812

12V/12V - 8A

24V/12V - 8A

- Heavy duty design, Soft start
- Short circuit protections
- Die-cast aluminum housing
- Design meets RoHS / CE
- Ignition triggered
- Over load/voltage protections
- Epoxy potting
- External fuse required
- 100% full load burn-in test
- Over temperature protections
- Waterproof level IP68
- 24 Month Warranty



Model	LDC-812
Charger Type	Float
DC Input	8-36V
Charge Voltage	13.8V
Output Current	8A
Efficiency	94%
Working Temperature	-30 °C to 80°C
LxWH (mm) - Weight	74x74x32 - 0.3Kg
Info/Price	

LDC-3012

12V/12V - 30A - Lithium Charger

24V/12V - 30A

- Ignition triggered
- LED Charging indicator light
- 100% full load burn-in test
- Advanced switch mode design
- Mount in almost any location
- Short circuit, Over load, Over voltage, Over temperature protections
- Aluminum shell, surface mountable
- Waterproof level IP65
- Design meets RoHS/CE
- Non-isolated between input and output
- External fuse required
- 24 Month Warranty

Model	LDC-3012
Battery Type	Lithium
DC Input	10-36V
Charge Voltage	14.2V
Output Current	30A
Efficiency	96%
Working Temperature	-30°C to 80°C
Cable size	10AWG
LxWH (mm) - Weight	200x77x30- 1.1Kg
Info/Price	



DC-DC CHARGER

SDC-1120
12V/12V - 20A



Model	SDC-1120
Current Output	20A
Input Voltage	9 - 16V DC
Output Voltage (adjustable)	13.2 - 14.8V
LxWxH (mm) - Weight	184x115x70 - 1.4kg
Info/Price	

- Charges GEL, WET & AGM batteries
- Switch mode high efficiency
- Short circuit & over temp protection

- 4 Stage battery charging
- No Radio interference
- Ignition trigger input

- Input/ Output isolated
- Cooling fan
- 12 Month Warranty

DC TO DC CONVERTER/CHARGER 24V-12V

VC-30
VC-40



VOLTECH ➤

Model	VC-30	
Input Voltage	19-36V DC	
Output Current	30A	40A
Preset Output Voltage	13.8V DC	
Adj. Output Range	12-15V DC	
Memory Output	12V 0.5A	
Efficiency	>90%	
Approvals	CE: EN 55022	
LxWxH (mm) - Weight	190x130x57 - 1Kg	210x130x57 - 1.1Kg
Info/Price		

- 19-36V DC Input
- Adjustable output (12-15V)
- Protections with fault codes
- Use as Converter or battery charge
- Auto recovery from:- Input under Voltage - Output over Voltage - Output short circuit - Output overload - Over temperature

- **LED Volts/Amps display**
- **Memory output (12V 0.5A)**
- Fused input & output

- 2 Stage charging
- Ignition trigger
- 24 Month warranty

DC TO DC CONVERTER / EQUALIZER / CHARGER 24V-12V

BBC-3140

Select from 24-12VDC Converter / 24V Battery Bank Equalizer or 24-12VDC Battery Charger modes.



- 40Amp Output
- Ignition trigger
- Over Voltage Protection
- Adj. Regulated Output
- Cooling fan
- 290x156x60mm - 2.3Kg

- 4 Stage Battery Charging
- Overload protection
- Reverse Polarity Protection
- No radio interference
- 12 Month warranty

BBR-3100

Optional Remote Control/ Display with 10m cable.
LxWxH -115 x 60 x 15mm

Model	BBC-3140	BBR-3100
Info/Price		



DC TO DC CONVERTER / CHARGER 36V - 12V

IPC-3120



- Can charge batteries (@13.8V)
- Ignition trigger
- Input/Output isolated
- Short circuit protection
- Fan cooled
- Parallel for more output
- No radio interference
- Over load protection
- Over temp protection
- 12 Month warranty

Model	Output Current	Output Voltage	LxWxH (mm) - Weight	Info/Price
IPC-3120	20A	36V - 12V	195x115x80 - 1.14Kg	

DC TO DC CONVERTER/CHARGER 48V - 12V

VC-4820

- Use as converter or charger
- Fault, mode and charge display
- Most protections auto recover
- 24 Month Warranty
- 2 Stage battery charging
- Ignition trigger
- Input & output fused
- LED Volts/Amps display
- Adjustable output
- Memory O/P Cut (12V/5A)



Model	VC-4820
Input Voltage	36-60V DC
Output Current	20A
Preset Output Voltage	13.8V DC
Adj. Output Range	12-15V DC
Memory Output	12V 0.5A
Efficiency	>90%
Approvals	EN 55022, EN 60335 2.29
Standby Current	<60mA
LxWxH (mm) - Weight	210x130x57 - 1.05Kg
Info/Price	

BATTERY PROTECTORS



- Stop batteries from being over discharged
- Switches load on/off automatically
- Optional remote on/off feature
- Can also operate as a master switch for 12V circuits
- Used by many caravan OEMs
- 24 Month Warranty

Model	Input A	Input V	Off Voltage (LVD)	On Voltage	LxWxH (mm) - Weight	Info/Price
BP-400	40A	12V	10V, 10.5, 11V, & 12V	LVD + 1V	85x70x35 - 0.4Kg	

LxWxH with bracket = 112 x 70 x 35mm

LED LIGHTS



LED LIGHT BARS

- Multi voltage input 9-32V
- Aluminium housing
- 24 Month Warranty
- Water resistant up to IP67
- Mounting hardware included



SINGLE ROW 3W

Model	LB-318S	LB-336S	LB-354S	LB-3108S	LB-3144S
Beam with EPISTAR LEDS	Flood	Flood	Flood	Flood	Flood
LED Qty / Watts	6 x 3W	12 x 3W	18 x 3W	36 x 3W	48 x 3W
Total Watts	18W	36W	54W	108W	144W
Current @ 12.6V/25.2V	1.0A/0.4A	2.2A/0.9A	3.6A/1.2A	3.3A/1.5A	4.3A/2.1A
LxWxH with bracket (mm)	225x54x40	380x45x40	540x45x35	1010x50x38	1325x50x38
LxWxH w/out bracket (mm)	185x45x30	340x45x28	500x45x30	970x50x30	1285x50x30
Info/Price					

SINGLE ROW 5W

Model	LB-530S	LB-560S	LB-590S	LB-5120S
Beam with EPISTAR LEDS	Combo	Combo	Combo	Combo
LED Qty / Watts	6 x 5W	12 x 5W	18 x 5W	24 x 5W
Total Watts	30W	60W	90W	120W
Current @ 12.6V/25.2V	0.4A/0.2A	1.0A/0.5A	1.4A/0.7A	1.9A/1.0A
LxWxH with bracket (mm)	185x75x75	340x75x75	545x65x55	640x75x75
LxWxH w/out bracket (mm)	185x75x52	340x75x52	490x65x50	640x75x52
Info/Price				

LED LIGHT BARS

- Multi voltage input 9-32V
- Water resistant up to IP67
- Aluminium housing
- Mounting hardware included
- 24 Month Warranty

SINGLE ROW - 10W



Model	LB-1020S	LB-1080S	LB-10180S
Beam with CREE LEDS	Combo	Combo	Combo
LED Qty / Watt	2 x 10W	8 x 10W	18 x 10W
Total Watts	20W	80W	180W
Current @ 12.6V/25.2V	0.7A/0.4A	4.7A/2.3A	11.1A/5.2A
LxWxH with bracket (mm)	120x90x70	440x65x110	945x65x110
LxWxH w/out bracket (mm)	120x90x65	440x65x80	945x65x80
Info/Price			

DOUBLE ROW - 10W



LB-1080D
Combo
8 x 10W
80W
3.2A/1.5A
200x90x105
200x90x100

LED WORK LIGHTS

- Multi voltage input 9-32V
- Water resistant up to IP67
- Cast Aluminium Casing
- Efficient Power Usage
- Mounting hardware included
- 24 Month Warranty



Model	LW-309R	LW-318R
Beam	Flood	Flood
LED Qty / Watt	3 x 3W	6 x 3W
Total Watts	9W	18W
Current @ 12.6V	0.3A	0.8A
Current @ 25.2V	0.2A	0.4A
DiaxDxH (mm)	80x50x90	115x50x130
LEDS	EPISTAR	EPISTAR
Info/Price		

LED LIGHTS

• Multi voltage input 10-30V

• ADR Approved


• 12 Month Warranty



**Note: No base plate
with VS-L178VR**

Model *	VS-L178VR	VS-L178VY	VS-L178VW
Application	Stop/Tail	Indicator	Rev. Light
Input Voltage	10V - 30V		
LxWxH (mm)	200x130x35		
Info/Price			

Model *	VS-L178VYR
Application	Stop/Ind. Ass.
Input Voltage	10V - 30V
LxWxH (mm)	400x130x35
Info/Price	



Model *	VS-L178VYRW
Application	Stop/Ind./Rev. Ass.
Input Voltage	10V - 30V
LxWxH (mm)	600x130x35
Info/Price	

Model *	VS-L177VR	VS-L177VY	VS-L177VW	VS-L177VRY
Application	Stop/Tail	Indicator	Rev. Light	Stop/Tail/Ind. Assy.
Input Voltage	10V - 30V			
LxWxH (mm)	180x100x35			
Info/Price				



Model *	VS-L103VY
Application	Side Marker
Input Voltage	10V - 30V
LxWxH (mm)	73x37x26
Info/Price	

Model *	VS-L04VY	VS-L4B	VS-L0K
Application	Indicator	Grommet	3 Pin plug
Input Voltage	10V - 30V	Suits VS-L04VY	Suits VS-L04VY
LxWxH (mm)	73x37x26	NA	365mm
Info/Price			

* For ADR Approval details visit our website - www.electroparts.com.au

GloTrac



GloTrac Combination Rear Lamps



Individual replacement lamps for 26058 series

Model	26058AK-V	26058RK-V	26058CK-V
Application	D.I. /Tail	Stop/Tail	Tail/Reverse
Info/Price			

Model	26058ARC-V	26058ARR-V
Application	D.I./Stop-Tail/Rev.	D.I./Stop/Tail
Voltage	12V - 24V	12V - 24V
LxWxH (mm)	591x132x55	591x132x55
Info/Price		

• **GloTrac lens design**

- Increase in tail lamp illumination area, significantly increase safety during night driving
- High quality, heavy duty construction & durability
- UV stabilized tough polycarbonate lens
- ADR Approved - refer website for details
- Individual replacement lamps available

GloTrac Combination Rear Lamps



Model	22558WAK-V	22558WRK-V	22713WCK-V
Application	D.I. /Tail	Stop/Tail	Tail/Reverse
Voltage	12V - 24V	12V - 24V	12V - 24V
DxH (mm)	109.5x40.2	109.5x40.2	109.5x40.2
Info/Price			

• **GloTrac lens design**

- Includes light, grommet & plug

• **Multi-reflector design**

- IP67 rated

• **Durable SMD LEDs**

- ADR Approved - refer website for details

GloTrac Combination Rear Lamps



• **GloTrac lens design**

- Stop/Tail/Indicator/Reverse
- 4-in-1 multifunction rear lamp
- Durable SMD LEDs
- IP67 rated water & dustproof
- Zero maintenance
- ADR Approved - refer website for details

Model	26057ARR-BV
Application	D.I./Stop/Tail Ass.
Voltage	12V - 24V
LxWxH (mm)	284x104x27
Trim	Black
Info/Price	

GloTrac Combination Rear Lamps

- GloTrac lens design
- 3-in-1 multifunction rear lamp

- Long life span, zero maintenance
- ADR Approved - refer website for details

- Stop/Tail/Indicator
- Horizontal mount
- Multi voltage 12/24V
- IP67 rated water/dustproof



Model	26059CAR-V
Application	D.I./Stop/Tail
Voltage	12V - 24V
LxWxH (mm)	222x94x24
Info/Price	

GloTrac Marker Lamps

- GloTrac lens design
- IP67 rated

- ADR Approved - refer website for details

- Polycarbonate lens



Model	26275CRK-BV
Application	Rear
Voltage	12V - 24V
LED Colour	Red
Len Colour	Clear
LxWxH (mm)	74x40x31
Info/Price	

LED Combination Rear Lamps



26007ARC-BV



26007ARR-BV

Model	26007ARC-BV	26007ARR-BV
Application	D.I./Stop-Tail/Rev.	D.I./Stop/Tail
Voltage	12V - 24V	12V - 24V
LxWxH (mm)	591x132x55	591x132x55
Info/Price		

- 5-in-1 multifunction rear lamp
- Horizontal or Vertical mount
- Durable SMD LEDs
- Comes with built-in reflector
- IP67 rated water & dustproof
- Long life span, zero maintenance
- ADR Approved - refer website for details
- Individual replacement lamps available below

Replacement modules for 26007 lamps



26007AK-V



26007CK-V

Model	26007AK-V	26007CK-V
Application	D.I. Ass.	Reverse Ass.
Voltage	12V - 24V	12V - 24V
LxWxH (mm)	192x122x32	192x122x32
Info/Price		

LED Rear Lamps



22018WAK-V

22018WRK-V

22018WCK-V

- Polycarbonate lens & housing
- Kit includes light, grommet & plug
- IP67 rated water & dustproof
- Multi-reflector design
- Long life span
- ADR Approved

Model	22018WAK-V	22018WRK-V	22018WCK-V
Application	D.I. Ass.	Stop/Tail	Reverse Ass.
Voltage	12V - 24V	12V - 24V	12V - 24V
LxWxH (mm)	134.6x87x36.8	134.6x87x36.8	134.6x87x36.8
Info/Price			

LED Rear Lamps



Model	Application	Voltage	Lens	LxWxH (mm)	Info/Price
26154RK-V	Stop/Tail	12V-24V	Red	259x26x12	
26154CK-V	Reverse Ass.	12V-24V	Clear	259x26x12	

- Surface mount ultra low profile
- Durable SMD LED

- With stainless steel bezel
- Fully sealed polycarbonate lens
- ADR Approved - refer website for details

LED Marker Lamps



Model	26265RK-1B
Application	Rear
Voltage	12V - 24V
LED Colour	Red
Lens Colour	Red
LxWxH (mm)	75x40x21
Info/Price	

- Surface mount ultra low profile
- IP67 rated water & dustproof

- UV tough polycarbonate lens
- Long life span, zero maintenance
- ADR Approved - refer website for details

LED Licence Plate Lamps




26271CK-G

Model	26271CK-G
Application	Number Plate
Voltage	12V - 24V
LxWxH	87x39x39
Info/Price	

- Mount horizontal or vertical
- ADR Approved - refer website for details

- Long life span, zero maintenance
- IP67 rated water/dustproof

Reflectors



- Rectangle reflector
- LxWxH (mm) - 70x33x8
- ADR Approved - refer website for details

Model	Colour	Info/Price
47001A	Amber	
47001R	Red	
47001C	Clear	

Resistors



- Draw the same amperage as a 21w bulb
- Can be used on vehicles that have electronic flasher units that are not LED compatible
- LxWxH (mm) - 50x15x15

Model	Voltage	Info/Price
56017-12	12V	
56017-24	24V	
Sold in pack of 2		

ELECTRICAL ACCESSORIES - CIRCUIT BREAKERS

Auto Reset Circuit Breakers:

W/Proof
50x75x45 - 42V Max



Model	Rating	Info/Price
CBA-8030	30AMP	
CBA-8040	40AMP	
CBA-8050	50AMP	
CBA-8060	60AMP	
CBA-8080	80AMP	
CBA-8100	100AMP	
CBA-8120	120AMP	
CBA-8150	150AMP	
CBA-8180	180AMP	
CBA-8200	200AMP	

Manual Reset Circuit Breakers:

W/Proof - 42V Max
30A to 150A - 50x75x45 (1/4" Studs)
180A to 250A - 50x90x45 (3/8" Studs)



Model	Rating	Info/Price
CBM-8030	30AMP	
CBM-8040	40AMP	
CBM-8050	50AMP	
CBM-8060	60AMP	
CBM-8080	80AMP	
CBM-8100	100AMP	
CBM-8120	120AMP	
CBM-8150	150AMP	
CBM-8180	180AMP	
CBM-8200	200AMP	
CBM-8250	250AMP	

Manual Reset Circuit Breakers:

W/Proof
- 42V Max



Model	Rating	Info/Price
CBM-9030	30AMP	
CBM-9040	40AMP	
CBM-9050	50AMP	
CBM-9060	60AMP	
CBM-9080	80AMP	
CBM-9100	100AMP	
CBM-9120	120AMP	
CBM-9150	150AMP	
CBM-9180	180AMP	
CBM-9200	200AMP	

Auto Reset Circuit Breaker Plastic:

90° Mount



Model	Rating
CBA-2010	10AMP
CBA-2015	15AMP
CBA-2020	20AMP
CBA-2025	25AMP
CBA-2030	30AMP
CBA-2040	40AMP
CBA-2050	50AMP
Info/Price	

Auto Reset Circuit Breaker Plastic:

Inline Mount



Model	Rating
CBA-3005	5AMP
CBA-3010	10AMP
CBA-3015	15AMP
CBA-3020	20AMP
CBA-3025	25AMP
CBA-3030	30AMP
CBA-3040	40AMP
CBA-3050	50AMP
Info/Price	

Manual Reset Circuit Breaker Plastic:

Inline Mount



Model	Rating
CBM-3010	10AMP
CBM-3015	15AMP
CBM-3020	20AMP
CBM-3025	25AMP
CBM-3030	30AMP
CBM-3040	40AMP
CBM-3050	50AMP
Info/Price	

Auto Reset Circuit Breaker Metal:

Inline Mount



Model	Rating
CBA-6010	10AMP
CBA-6015	15AMP
CBA-6020	20AMP
CBA-6025	25AMP
CBA-6030	30AMP
CBA-6040	40AMP
CBA-6050	50AMP
Info/Price	

Auto Reset Circuit Breaker: Plug In



Model	Rating
CBA-4010	10AMP
CBA-4015	15AMP
CBA-4020	20AMP
CBA-4025	25AMP
CBA-4030	30AMP
Info/Price	

ELECTRICAL ACCESSORIES - CIRCUIT BREAKERS

Auto Reset Circuit Breaker: Micro Blade



Model	Rating
CBA-4710	10AMP
CBA-4715	15AMP
CBA-4720	20AMP
CBA-4725	25AMP
CBA-4730	30AMP
Info/Price	

Manual Reset Circuit Breaker: Micro Blade



Model	Rating
CBM-4710	10AMP
CBM-4715	15AMP
CBM-4720	20AMP
CBM-4725	25AMP
CBM-4730	30AMP
Info/Price	

Auto Reset Circuit Breaker: Blade



Model	Rating
CBA-1510	10AMP
CBA-1515	15AMP
CBA-1520	20AMP
CBA-1525	25AMP
CBA-1530	30AMP
Info/Price	

Manual Reset Circuit Breaker: Blade



Model	Rating
CBM-1510	10AMP
CBM-1515	15AMP
CBM-1520	20AMP
CBM-1525	25AMP
CBM-1530	30AMP
Info/Price	

Auto Reset Circuit Breaker: Mini Blade



Model	Rating
CBA-4510	10AMP
CBA-4515	15AMP
CBA-4520	20AMP
CBA-4525	25AMP
CBA-4530	30AMP
Info/Price	

Manual Reset Circuit Breaker: Mini Blade



Model	Rating
CBM-4510	10AMP
CBM-4515	15AMP
CBM-4520	20AMP
CBM-4525	25AMP
CBM-4530	30AMP
Info/Price	

Auto Reset Circuit Breaker: Maxi Blade



Model	Rating
CBA-7520	20AMP
CBA-7525	25AMP
CBA-7530	30AMP
CBA-7540	40AMP
CBA-7550	50AMP
Info/Price	

Manual Reset Circuit Breaker: Maxi Blade



Model	Rating
CBM-7520	20AMP
CBM-7525	25AMP
CBM-7530	30AMP
CBM-7540	40AMP
CBM-7550	50AMP
Info/Price	

ELECTRICAL ACCESSORIES - BOOTLACE TERMINAL KIT

BTK-1

Bootlace Terminal Kit with Crimp Tool (470 Terminals) in handy zip wallet.

We've stocked this kit with terminals you'll actually use, including single & double cable terminals.

Ratchet crimp tool suits 0.25mm² to 10mm² or 23 to 7 AWG wire.



Model	BTK-1
Info/Price	

Model	Rating
E1508 1.5mm ² (16AWG) Black 50 Pcs	
E2508 2.5mm ² (14AWG) Blue 150 Pcs	
E4009 4mm ² (12AWG) Grey 100 Pcs	
E6012 6mm ² (10AWG) Yellow 50 Pcs	

Model	Rating
E10-12 10mm ² (8AWG) Red 20 Pcs	
TE2510 2x2.5mm ² (2x14AWG) Grey 30 Pcs	
TE4012 2x4mm ² (2x12AWG) Orange 40 Pcs	
TE6014 2x6mm ² (2x10AWG) Green 30 Pcs	

ELECTRICAL ACCESSORIES - FUSE BOXES & HOLDERS

LED Fuse Box: Blade Type



Model	LxWxH	Suits	Info/Price
FB-L1504	85x50x40	4 x Blade	
FB-L1506	86x65x40	6 x Blade	
FB-L1508	85x85x40	8 x Blade	
FB-L1510	85x95x40	10 x Blade	
FB-L1512	115x85x40	12 x Blade	

Fuse Box: Maxi Type



Model	LxWxH	Suits	Info/Price
FB-7502	110x40x30	2x Maxi	

Fuse Box: ANL Type



Model	LxWxH	Suits	Info/Price
FH-ANL-101	150x40x45	1 x ANL	

Fuse Holder: ANL Bolt In



Model	LxWxH	Suits	Info/Price
FH-ANL	88x30x45	ANL	

Fuse Holder: MIDI Bolt In



Model	LxWxH	Suits	Info/Price
FH-MIDI	55x18x33	MIDI	

Fuse Holder: MEGA Bolt In



Model	LxHxW	Suits	Info/Price
FH-MEGA	130x38x45	MEGA	

Fuse Holder: 3AG

Sold only in packs of 10



Model	W/Gauge	Length	Info/Price
FH-323	16 - 3mm	600mm	
FH-324	14 - 4mm	600mm	
FH-325	12 - 5mm	600mm	

Fuse Holder: Blade

Sold only in packs of 10



Model	W/Gauge	Length	Info/Price
FH-155B	12 - 5mm	600mm	
Tinned Copper Wire			

Fuse Holder: Blade

Sold only in packs of 10



Model	W/Gauge	Term.	Info/Price
FH-155C	NA	Crimp	
Comes with 2 wire grommet sizes			

Fuse Holder: Mini Blade

Sold only in packs of 10




Model	W/Gauge	Length	Info/Price
FH-455B	12 - 5mm	600mm	
Tinned Copper Wire			

ELECTRICAL ACCESSORIES - FUSE HOLDERS & ADAPTORS

Fuse Holder: Mini Blade

Sold only in packs of 10



Model	W/Gauge	Term.	Info/Price
FH-455C	NA	Crimp	
Comes with 2 wire grommet sizes			

LED Fuse Holder: Mini Blade Fuse - LED Lights up when fuse is blown

Sold only in packs of 10



Model	W/Gauge	Length	Info/Price
FH-L455	12 - 5mm	270mm	

LED Fuse Holder: Blade Fuse - LED Lights up when fuse is blown

Sold only in packs of 10



Model	W/Gauge	Length	Info/Price
FH-L155	12 - 5mm	270mm	

LED Fuse Holder: Maxi Blade Fuse - LED Lights up when fuse is blown

Sold individually



Model	W/Gauge	Length	Info/Price
FH-L758	6 - 8mm	350mm	

Fuse Holder: Blade

Sold only in packs of 10



Model	W/Gauge	Length	Info/Price
FH-153	16 - 3mm	600mm	
FH-154	14 - 4mm	600mm	
FH-155	12 - 5mm	600mm	

Fuse Holder: Mini Blade Fuse

Sold only in packs of 10



Model	W/Gauge	Length	Info/Price
FH-453	16 - 3mm	600mm	
FH-455	12 - 5mm	600mm	

Fuse Holder: Micro Blade Fuse

Sold only in packs of 10



Model	W/Gauge	Length	Info/Price
FH-475	12 - 5mm	600mm	

Fuse Holder: Micro 2 Blade Fuse

Sold only in packs of 10



Model	W/Gauge	Length	Info/Price
FH-485	12 - 5mm	600mm	

Fuse Holder: Maxi Blade Fuse

Sold individually



Model	W/Gauge	Length	Info/Price
FH-756	10 - 6mm	350mm	
FH-758	8 - 8mm	350mm	
FH-759	6 - 9mm	350mm	

Fuse Adaptor: Blade Fuses

Sold only in packs of 10



Model	Holds	Info/Price
FA-1500	2x Blade Fuses	

Fuse Adaptor: Mini Blade Fuses

Sold only in packs of 10



Model	Holds	Info/Price
FA-4500	2 x Mini Blade Fuses	

Fuse Adaptor: Micro Blade Fuses


Sold only in packs of 10



Model	Holds	Info/Price
FA-4700	2 x Micro Blade Fuses	


Fuse Adaptor: Micro 2 Blade Fuses

Sold only in packs of 10



Model	Holds	Info/Price
FA-4800	2 x Micro 2 Blade Fuses	


Fuse Adaptors - Fast & Convenient

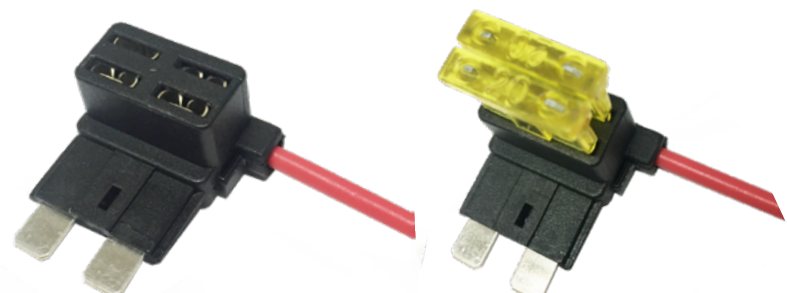

ELECTRICAL ACCESSORIES - FUSES & TOOLS

Fuses: Blade


Pack of 50



Model	Rating
AF-1503	3AMP
AF-1505	5AMP
AF-1507	7.5AMP
AF-1510	10AMP
AF-1515	15AMP
AF-1520	20AMP
AF-1525	25AMP
AF-1530	30AMP
AF-1535	35AMP
AF-1540	40AMP
Info/Price	

Fuses: Mini Blade

Pack of 50



Model	Rating
AF-4502	2AMP
AF-4503	3AMP
AF-4505	5AMP
AF-4507	7AMP
AF-4510	10AMP
AF-4515	15AMP
AF-4520	20AMP
AF-4525	25AMP
AF-4530	30AMP
Info/Price	

Fuses: Micro Blade

Pack of 50



Model	Rating
AF-4705	5AMP
AF-4707	7AMP
AF-4710	10AMP
AF-4715	15AMP
AF-4720	20AMP
AF-4725	25AMP
AF-4730	30AMP
Info/Price	

Fuses: Micro 2 Blade


Pack of 50



Model	Rating
AF-4805	5AMP
AF-4807	7AMP
AF-4810	10AMP
AF-4815	15AMP
AF-4820	20AMP
AF-4825	25AMP
AF-4830	30AMP
Info/Price	

Fuses: Maxi Blade


Pack of 20



Model	Rating
AF-7520	20AMP
AF-7530	30AMP
AF-7535	35AMP
AF-7540	40AMP
AF-7550	50AMP
AF-7560	60AMP
AF-7570	70AMP
AF-7580	80AMP
AF-75100	100AMP
Info/Price	

Fuses: MIDI

Sold individually



Model	Rating
MIDI-030	30AMP
MIDI-040	40AMP
MIDI-050	50AMP
MIDI-060	60AMP
MIDI-070	70AMP
MIDI-080	80AMP
MIDI-100	100AMP
MIDI-125	125AMP
MIDI-150	150AMP
MIDI-200	200AMP
Info/Price	

Fuses: MEGA

Sold individually



Model	Rating
MEGA-080	80AMP
MEGA-100	100AMP
MEGA-125	125AMP
MEGA-150	150AMP
MEGA-175	175AMP
MEGA-200	200AMP
MEGA-225	225AMP
MEGA-250	250AMP
MEGA-300	300AMP
Info/Price	

Fuses: ANL


Sold individually



Model	Rating
ANL-050	50AMP
ANL-080	80AMP
ANL-100	100AMP
ANL-150	150AMP
ANL-200	200AMP
ANL-250	250AMP
ANL-300	300AMP
ANL-350	350AMP
ANL-400	400AMP
ANL-450	450AMP
ANL-500	500AMP
Info/Price	

Fuses: Glass

Pack of 50



Model	Rating
AF-3203	3AMP
AF-3205	5AMP
AF-3207	7AMP
AF-3210	10AMP
AF-3215	15AMP
AF-3220	20AMP
AF-3225	25AMP
AF-3230	30AMP
AF-3235	35AMP
AF-3240	40AMP
Info/Price	

Fuse Puller:

Blade style with LED tester



Model	Info/Price
FP-410	

Fuse Puller:

Blade & Glass Type



Model	Info/Price
FP-431	

Fuse Puller:

Blade & Glass Type



Model	Info/Price
FP-432	

Fuse Puller:

Mini, Micro & Micro 2 Type



Model	Info/Price
FP-433	

ELECTRICAL ACCESSORIES - BATTERY FUSES & HOLDERS

Battery Post Fuses

- Ceramic mounted
- Ignition Protected
- Max. Current: 300A
- Max. Voltage: 58V
- IP67 Rated
- Marine rated

Model	Rating
BF-100IP	100AMP
BF-150IP	150AMP
BF-200IP	200AMP
BF-250IP	250AMP
BF-300IP	300AMP
Info/Price	



Battery Post Fuse Holders

- Max. Current: 300A
- Max. Voltage: 58V
- M8 Studs
- Max. Torque: 75 in-lb

Model	Rating	Info/Price
BFH-1	Single Pole	
BFH-2	Double Pole	




ELECTRICAL ACCESSORIES - BUS BARS

Bus Bars

- Material: Copper, Stainless & Nylon (Flame Retardant)
- Max Voltage: 48V DC
- Colours: Red & Black
- Studs: M8

Model	Rating	Info/Price
2WBRR	150AMP	
2WBRR	150AMP	
4WBRR	250AMP	
4WBRR	250AMP	

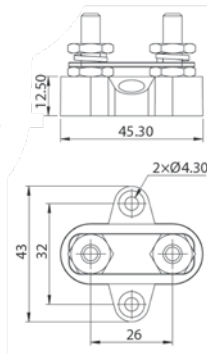

NEW

ELECTRICAL ACCESSORIES - CABLE TIES

Cable Ties - Weather Resistant - Packs of 100

Model	Length	Width	Strength	Info/Price
CT-100B25	100mm	2.5mm	8kg	
CT-150B36	150mm	3.6mm	18kg	
CT-200B25	200mm	2.5mm	8kg	
CT-200B36	200mm	3.6mm	18kg	
CT-200B48	200mm	4.8mm	22kg	
CT-250B48	250mm	4.8mm	22kg	
CT-300B48	300mm	4.8mm	22kg	
CT-300B75	300mm	7.5mm	65kg	
CT-365B75	365mm	7.5mm	65kg	
CT-370B48	370mm	4.8mm	22kg	

Packs of 100



ELECTRICAL ACCESSORIES - CONNECTORS

Connector: AP-50 Series

50Amp. Kit includes:
2 x Silver plated copper terminals 6 AWG
1 x Polycarbonate housing



Model	Colour
AP-50G	Grey
AP-50R	Red
AP-50BK	Black
AP-50B	Blue
AP-50Y	Yellow
Info/Price	

Terminal: AP-50 Series

1 x Silver plated copper terminal 6 AWG



Model	Info/Price
AP-50GT	

Genuine Anderson Power

50Amp. Kit includes:
2 x Silver plated copper terminals 6 AWG
1 x Polycarbonate housing



Model	Colour	Info/Price
SB50G	Grey	
SB50R	Red	

Connector: AP-50 Series

3-Pin 50Amp. Kit includes:
3 x Silver plated copper terminals 6 AWG
1 x Polycarbonate housing



Model	Colour
AP-50G-3P	Grey
Info/Price	

Dust Covers

Black rubber dust cover



Model	Suits	Info/Price
AP-50DC	AP-50 Series	
AP-120DC	AP-120B	
AP-175DC	AP-175G	

AP-50G-BC

AP-50 Series - 50 Amp to Battery Clamps Cable Adaptor



Model	Info/Price
AP-50G-BC	

AP-50G-MC4

AP-50 Series - 50 Amp to Solar MC4 Cable Adaptor



Model	Info/Price
AP-50G-MC4	

Connector: AP-120 Series

120Amp. Kit includes:
2 x Silver plated copper terminals 2 AWG
1 x Polycarbonate housing



Model	Colour
AP-120B	Blue
Info/Price	

Connector: AP-175 Series

175Amp. Kit includes:
2 x Silver plated copper terminals 1/0 AWG
1 x Polycarbonate housing



Model	Colour
AP-175G	Grey
Info/Price	

Sealed Connectors: AP-50 Series

Weather resistant to IP67

50amp. Kit includes:
2 x Silver plated copper terminal
2 x Cable seals & clamping hardware
1 x Polycarbonate housing
Cable not included



Model	Colour	Type	Info/Price
AP-50BWM	Blue	Male	
AP-50BWF	Blue	Female	

AP-50G-MP

AP-50 Series - 50 Amp with Mounting Plate Adaptor



Model	Info/Price
AP-50G-MP	

ELECTRICAL ACCESSORIES - RELAYS & BASES

Mini Relays

- Highest quality contacts
- Resistor protected
- Plated copper terminals
- Larger mounting hole
- Removable bracket
- Epoxy sealed



Model	Type	Voltage	Amps	Pins	Info/Price
R12-2A	N/Open	12	50	5	
R12-1C	C/Over	12	50/30	5	
R24-2A	N/Open	24	30	5	
R24-1C	C/Over	24	30/20	5	

Micro Relays

- Plated copper terminals
- Resistor protected
- Epoxy sealed



Model	Type	Voltage	Amps	Pins	Info/Price
RM12-1A	N/Open	12	25	4	
RM12-1C	C/Over	12	25/20	5	
RM24-1A	N/Open	24	15	4	
RM24-1C	C/Over	24	15/10	5	

Relay Base

- Suit mini relays
- Interlockable

Model	Info/Price
RB-2	



Relay Base

- Suit micro relays
- Interlockable

Model	Info/Price
RB-5	



European Type Mini Relays

- Plated copper terminals
- Resistor protected
- 4 and 5 Pin Models



Model	Type	Voltage	Amps	Pins	Info/Price
RE12-1A	N/Open	12	40	4	
RE12-1C	C/Over	12	40/30	5	

Heavy Duty Relays

- Plated copper terminals
- Larger 30 & 87 terminals
- Large contacts
- Removable steel bracket
- Resistor protected



Model	Type	Voltage	Amps	Pins	Info/Price
RH12-1A	N/Open	12	80	4	
RH24-1A	N/Open	24	50	4	

Japanese Type Mini Relays

- 30 Amp contact
- Epoxy sealed



Model	Type	Voltage	Amps	Pins	Info/Price
R-387-12	N/Open	12	30	4	

Relay Base

- Suit H/Duty relays
- Interlockable

Model	Info/Price
RB-6	



ELECTRICAL ACCESSORIES - DIODES & BRIDGE RECTIFIERS


Diodes

Model	Voltage	Rating	Pack	Info/Price
D-1	1000	1AMP	10	
D-3	1000	3AMP	10	
D-6	1000	6AMP	10	



BRIDGE RECTIFIER

Model	Voltage	Rating	Info/Price
BR-37	1000	50AMP	



ELECTRONIC FLASHER

Replaces mechanical flasher cans

- Operates from 6V to 30V
- Fully electronic with buzzer
- Replaces mechanical flasher cans
- For buses, trucks, earthmoving etc
- Constant flash rate
- Proven use on garbage trucks
- 12 month warranty

**CLEARANCE LINE
LIMITED STOCK**

Model	Voltage	Rating	Info/Price
EF-1	6 - 30V	20AMP	



GALVANIC ISOLATOR

Prevents excess zinc loss and major galvanic damage to your boat parts and equipment from minor ground circuit faults.

**CLEARANCE LINE
LIMITED STOCK**

Model	Voltage	Max. Shore Power	Info/Price
GI-50	110 - 240 V AC	50AMPS	



TURBO TIMER

- Series connection
- 1 min / 3 min / reset
- Micro toggle switch
- 10 Amp capacity
- Use external relay for greater capacity

**CLEARANCE LINE
LIMITED STOCK**

Model	Voltage	Dims. LxWxH (mm)	Info/Price
T-200	24V	97 x 46 x 20	



STARTER MOTOR SOLENOID CONTACTS

To suit Nippon Denso gear reduction starter motors

Model	Notes	Pack	Info/Price
SC-1	Rodeo	10	
SC-2	Honda	10	
SC-4	Large type	10	
SC-7		10	
SC-9	Large type	10	


**CLEARANCE LINE
LIMITED STOCK**



STARTER MOTOR SOLENOID PLUNGERS

To suit Nippon Denso gear reduction starter motors

Model	Notes	Length	Info/Price
SC-11	Rodeo (43mm copper washer)	97mm	
SC-12	(37mm copper washer)	100mm	
SC-13	Camry (37mm copper washer)	126mm	
SC-14	Subaru (34mm copper washer)	126mm	

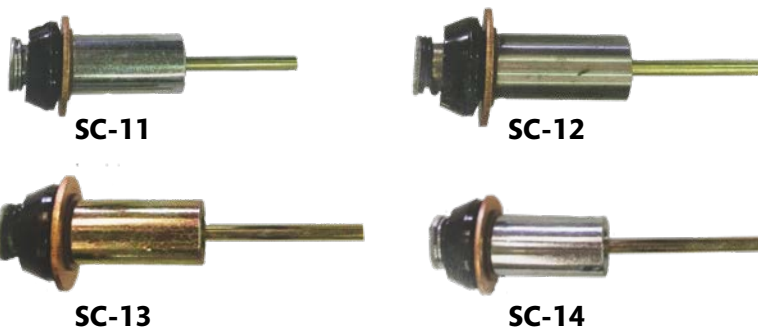

**CLEARANCE LINE
LIMITED STOCK**



ELECTRO PARTS
AUSTRALIA PTY LTD

BRISBANE



51 Southlink St
Parkinson, QLD 4115
P: (07) 3219 6655

Toll Free : 1300 10 60 10

E: sales@electroparts.com.au
W: www.electroparts.com.au

**Servicing
Australia Wide**

